INSTALLATION INSTRUCTION FOR FIXTURE 179-301

WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.

ASSEMBLY THE FIXTURE(FIG.1)

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the support tubes(H) together tightly;
3. Screw the bottom end of the support tube(H) onto the nipple(I) tightly, and thread the top end of support tube(H) into the swivel joint(G) properly, and tighten with the thumb screw on the swivel joint(G);
4. Put the Glass Shade(M) over the socket(L) well, and secure with socket ring(N);
5. Hook the Crystal Drop(K) onto the decorative leaf(J) well.

MOUNTING THE FIXTURE

1, Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from ceiling. Including the cross bar.

2, Thread the mounting screws(C) properly into the pre-drilled mounting holes on the Cross Bar(D), then attach the cross bar(D) onto the outlet box using the outlet box screws, the side of the cross bar(D) marked with "GND" must be faced out.

3, Follow the wire wiring instructions carefully (See Fig.2).

4, Life up the canopy(E) over the outlet box, and let mounting screws(C) protrude the pre-drilled mounting holes on the Canopy(E), then secure with Ball nut(F) tightly.

6. Install the light bulb in accordance with fixture's specifications. DO NOT EXCEED THE MAXMUM WATTAGE RATING!

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nut was secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the cross bar.
2. Tuck the wire connections neatly into the ceiling junction box.

Fig.1

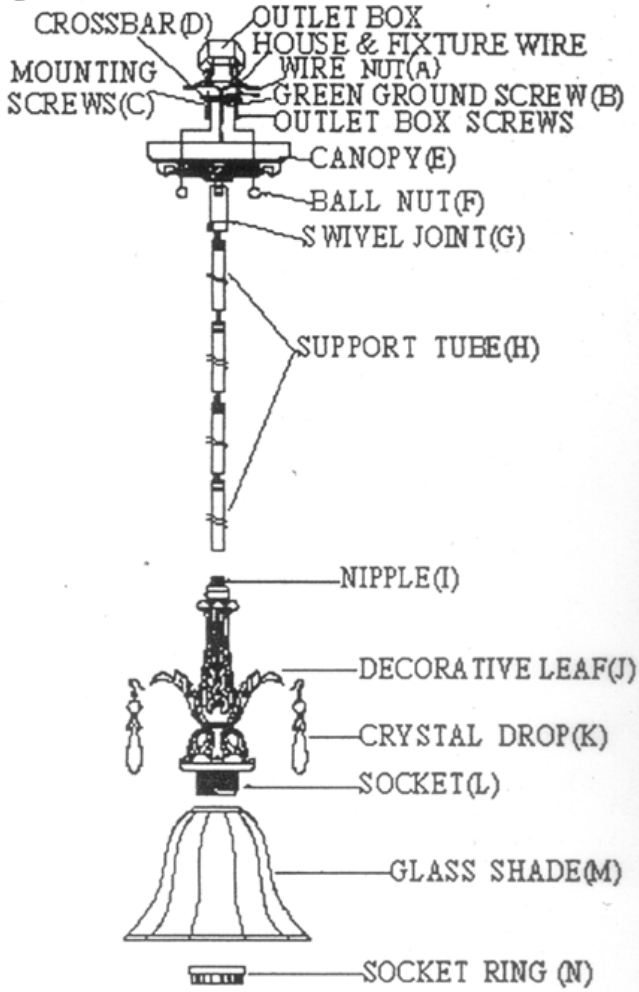

Fig.2

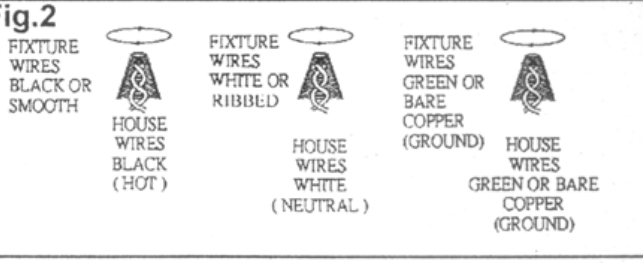
FIXTURE WIRES BLACK OR SMOOTH
HOUSE WIRES BLACK (HOT)
FIXTURE WIRES WHITE OR RIBBED
HOUSE WIRES WHITE (NEUTRAL)
FIXTURE WIRES GREEN OR BARE COPPER (GROUND)
HOUSE WIRES GREEN OR BARE COPPER (GROUND)

UL® Listed

american lighting association